Ansell Lighting AUND1/1 Unity Downlight 1

Datasheet Pack - 10W Fixed White LED Downlight 80mm Cut-Out

This pack contains the two original Ansell datasheets:

1. AUND1/1/WW - 3000K Warm White (pages 2-3)

2. AUND1/1/CW - 4000K Cool White (pages 4-5)

Unity Downlight

Part of the Downlights product category

Model	Unity 1 Downlight Warm White
Code	AUND1/1/WW
Application	Commercial, Education, Hospitality, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	10W
Operating Temp	-20°C - 25°C
Lumens Delivered	1300lm
lm/W	130lm/W
CCT	3000K
UGR	18
Beam Angle	56

MATERIAL INFORMATION

Main Material	Aluminium
Product Weight without Packaging	0.38 kg
Colour / Finish	Sand White
Diameter	90 mm
Height	62 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	90
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.97
L70 @ 25°C	L70 100,000h

PRODUCT FEATURES

- IP65 compact high performance architectural downlight suitable for commercial, hospitality and retail applications. Only bottom of the fitting obtains IP65 rating.
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort (AUND1/** and AUND2/** only)
- Upto 130 lm/W efficiency and CRI 90 provides elite level performance and light quality
- Die-cast aluminium construction and powder coated finish provide stylish and modern appearance
- Remote driver with plug and play connection

ACCESSORIES

AUND1/1/BK	Unity Downlight 1 Black Bezel







Unity Downlight

Part of the Downlights product category

Model	Unity 1 Downlight Warm White
Code	AUND1/1/WW
Application	Commercial, Education, Hospitality, Retail

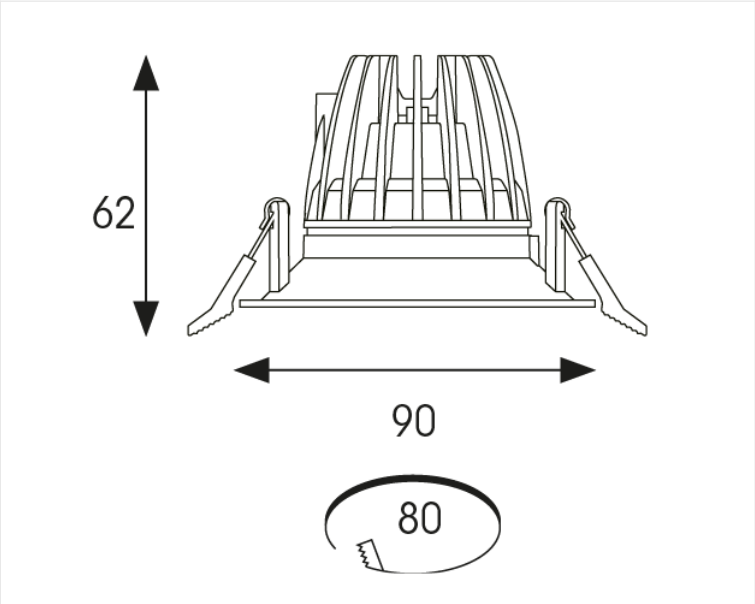

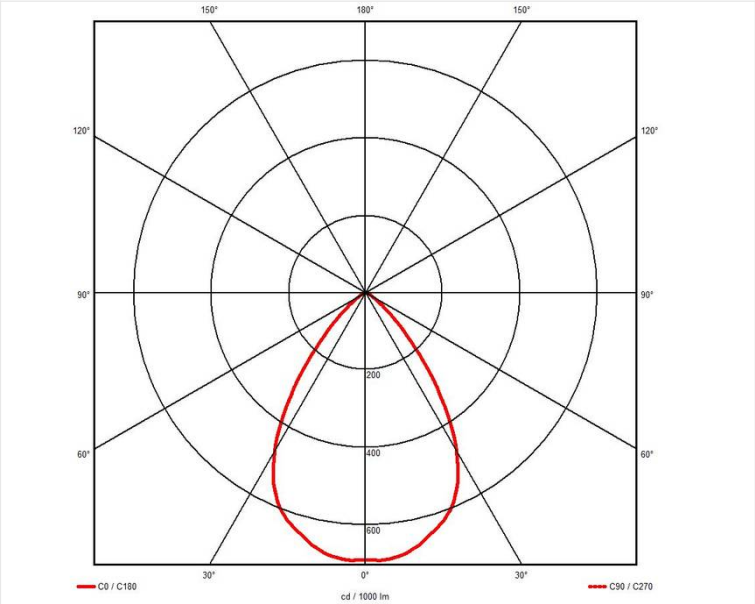









Unity Downlight

Part of the Downlights product category

Model	Unity 1 Downlight Cool White
Code	AUND1/1/CW
Application	Commercial, Education, Hospitality, Retail

GENERAL INFORMATION

Input	220-240V
Wattage	10W
Operating Temp	-20°C - 25°C
Lumens Delivered	1200lm
lm/W	125lm/W
CCT	4000K
UGR	18
Beam Angle	56

MATERIAL INFORMATION

Main Material	Aluminium
Product Weight without Packaging	0.38 kg
Colour / Finish	Sand White
Diameter	90 mm
Height	62 mm

TECHNICAL INFORMATION

Class Protection	2
Light Source	LED
SDCM (Initial Macadam)	3
CRI	90
Internal / External	Internal
Surface / Recessed / Suspended	Recessed
Power Factor	0.97
L70 @ 25°C	L70 100,000h

PRODUCT FEATURES

- IP65 compact high performance architectural downlight suitable for commercial, hospitality and retail applications. Only bottom of the fitting obtains IP65 rating.
- UGR<19 (unified glare rating) compliant luminaire assisting to eliminate glare for visual comfort (AUND1/** and AUND2/** only)
- Upto 130 lm/W efficiency and CRI 90 provides elite level performance and light quality
- Die-cast aluminium construction and powder coated finish provide stylish and modern appearance
- Remote driver with plug and play connection

ACCESSORIES

AUND1/1/BK	Unity Downlight 1 Black Bezel





Unity Downlight

Part of the Downlights product category

Model	Unity 1 Downlight Cool White
Code	AUND1/1/CW
Application	Commercial, Education, Hospitality, Retail

