



02 Recessed Spots Fixed LED>Mini Spots Aluminium

10103B/AL/W



1W/2W COB LED recessed spot IP20.

Requires 350mA/700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads




Dimensions

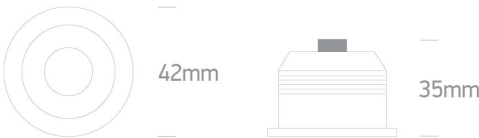

Must be ordered separately



89004



89004A



89004AT

Physical Specification

Item Group
Family
Order Code
Colour
Material
Shape

02 Recessed Spots Fixed LED
Mini Spots Aluminium
10103B/AL/W
Aluminium
Aluminium
Circular

Height	35mm
Diameter	42mm
Cutout Hole Diameter	35mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	350mA/700mA
Safety Class	
Power(Watts)	1W/2W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	

Illumination Data

Colour Temperature	3000K
Lumen Output	200lm@700mA
Light Efficiency	100lm/W
CRI	90
Beam Angle	40°
Illumination Diagram	

Packing Info

Box Length

9cm

Box Width

6cm

Box Height

5,5cm

Box Weight

0.071kg

Pcs/Carton

100

Barcode

5291889042440

HS Code

9405413990

Certification & Warranty

Warranty

5 years

switch to
one light!





02 Recessed Spots Fixed LED>Mini Spots Aluminium

10103B/W/C



1W/2W COB LED recessed spot IP20.

Requires 350mA/700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads




Dimensions

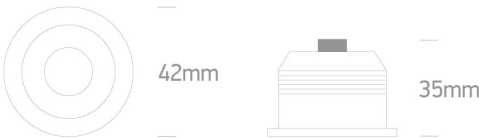


Must be ordered separately



89004



89004A



89004AT

Physical Specification

Item Group
Family
Order Code
Colour
Material
Shape

02 Recessed Spots Fixed LED
Mini Spots Aluminium
10103B/W/C
White
Aluminium
Circular

Height	35mm
Diameter	42mm
Cutout Hole Diameter	35mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	350mA/700mA
Safety Class	
Power(Watts)	1W/2W
IP Rating	IP20
Light Source	LED built in
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	

Illumination Data

Colour Temperature	4000K
Lumen Output	200lm@700mA
Light Efficiency	100lm/W
CRI	90
Beam Angle	40°
Illumination Diagram	

Packing Info

Box Length	6,5cm
Box Width	5,5cm
Box Height	5,5cm
Box Weight	0.071kg
Pcs/Carton	100
Barcode	5291889068150
HS Code	9405413990

Certification & Warranty

Warranty	5 years
----------	---------

switch to
one light!

