

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Manot

Kosnic

09345 MAN0305

Manot Emergency Bulkhead 5W Manual test 6500K

- Used as emergency exit sign as well as emergency light
- Surface-mounting positions
- Maintained and non-maintained option
- IP65 and IK10 (vandal resistant) for external uses
- BESA box fitting points



Overview

The Manot LED Emergency Exit Bulkhead is a self-contained, robust, maintained or non-maintained 3 hour emergency solution. Can be surface mounted, recessed or installed with a tilting bracket. Comes with upward arrow exit sign for wall mounting and can be used without signs as an emergency light. Self-test option available.



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing - Polycarbonate
Protection Rating	Class II
Installation Area	Internal and External
UEM/EME Protection	Class II

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 61347-1:2015+A1:2021, EN 61347-2-7:2012+A1:2021, EN 61347-2-13:2014+A1:2017, EN 62031:2020, EN 62493:2015+A1:2022
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary

Product Code	MAN0305
Default Power	6 W
Default CCT	6,500 K
Lumens Output Maximum	60 lm
Maximum Efficiency	50 lm/W
Emergency Luminous Flux	60 lm
Maintained Luminous Flux	150 lm
Weight	0.75Kg
Dimensions (L x W x D) (mm)	325x158x48
BESA Entry	True
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 40°C
UEM/EME Power Factor	0.5
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Manual
UEM/EME Input Power (Max)	6 W
UEM/EME Protection	Class II
UEM/EME Dimensions (L x W x D) (mm)	158x325x48
UEM/EME Emergency Operation Test	Manual
Beam Angle - Lumi (°)	120

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

5 5 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Manot



09345 MAN0305

Accessories

Product Code	Description	Type
KBAT2600LI1	Li-ion Battery Pack, 2600mAh for self test versions of Manot, Mulu, Belum, Kalem, Nitro, Nitro surface, Doxa	Battery
MAN-BKT	Manot, Wall-mount Tilting Bracket	Clips/Brackets
MANH-ESD	Manot, Hanging Exit Down Sign	
MANH-ESU	Manot, Hanging Exit Up Sign	
MANH-ESLR	Manot, Hanging Exit Left & Right Sign	
MAN-REC	Manot, Spring Clips for Recessed Installation	Clips/Brackets
MAN-ESR	Manot, Exit Sign Right	Sign
MAN-ESL	Manot, Exit Sign Left	Sign
KBAT2000LFP1	LPF battery standard DD EME, NEKA, Trent OnSite 2ft	Battery

Overview

The Manot LED Emergency Exit


Bulkhead is a self-contained, robust, maintained or non-maintained 3 hour emergency solution. Can be surface mounted, recessed or installed with a tilting bracket.

Comes with upward arrow exit sign for wall mounting and can be used without signs as an emergency light. Self-test option available.



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing - Polycarbonate
Protection	Class II
Rating	
Installation Area	Internal and External
UEM/EME	Class II
Protection	

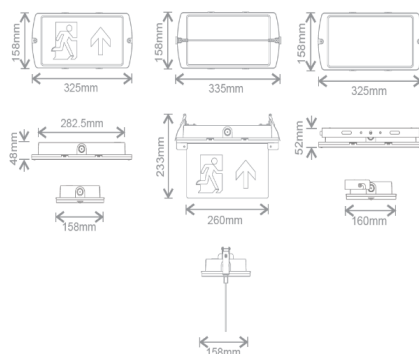

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK