

02 Recessed Spots Fixed LED>The Mirror Dark Light Range

10103H/B/W



3W Dark light recessed spot, IP20.

Complete with 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

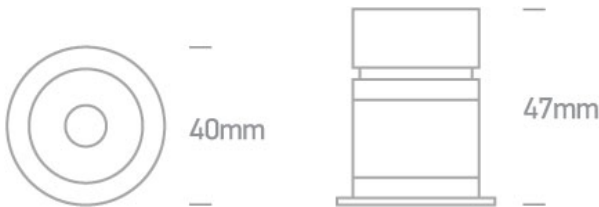

Physical Specification

Item Group	
Family	
Order Code	
Colour	
Material	
Shape	
Height	
Diameter	
Cutout Hole Diameter	
Recessed Ceiling	
Depth Required	
Indoor	

02 Recessed Spots Fixed LED
The Mirror Dark Light Range
10103H/B/W
Black
Aluminium
Circular
47mm
40mm
34mm
Yes
70mm
Yes

Adjustable	No
------------	----

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
Dimmable	No

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	3,5V
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 3535
LED Brand	Bridgelux
LED Number	1
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	1,75-3,15W
Power Factor	0,5
Constant Current	Yes
700mA	2,5-4,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-20°C...+50°C
Operating Temp	75°C
Brand	Eaglerise
Protection	Over Load Protection, Over Voltage Protection, Short circuit Protection

Illumination Data

Colour Temperature	3000K
Lumen Output	160lm
Light Efficiency	53,33lm/W
CRI	90
Beam Angle	38°
Illumination Diagram	
Dark Light	Yes

Packing Info

Pcs/Carton	60
Barcode	5291889074960
HS Code	9405413990

Certification & Warranty

switch to
one light!

one
LIGHT





02 Recessed Spots Fixed LED>The Mirror Dark Light Range

10103H/W/W



3W Dark light recessed spot, IP20.

Complete with 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

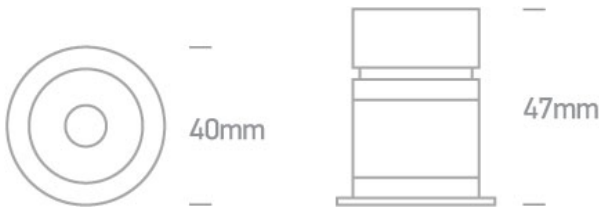

Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The Mirror Dark Light Range
Order Code	10103H/W/W
Colour	White
Material	Aluminium
Shape	Circular
Height	47mm
Diameter	40mm
Cutout Hole Diameter	34mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes

Adjustable	No
------------	----

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
Dimmable	No

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	3,5V
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 3535
LED Brand	Bridgelux
LED Number	1
F Mark	

Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	1,75-3,15W
Power Factor	0,5
Constant Current	Yes
700mA	2,5-4,5V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	-20°C...+50°C
Operating Temp	75°C
Brand	Eaglerise
Protection	Over Load Protection, Over Voltage Protection, Short circuit Protection

Illumination Data

Colour Temperature	3000K
Lumen Output	160lm
Light Efficiency	53,33lm/W
CRI	90
Beam Angle	38°
Illumination Diagram	
Dark Light	Yes

Packing Info

Pcs/Carton	60
Barcode	5291889074953
HS Code	9405413990

Certification & Warranty

switch to
one light!

one
LIGHT

