

## AEMBLADE/M



2.7W 5-In-1 Maintained Emergency Hanging Exit Sign

**5·In·1 Blade**

### PRODUCT FEATURES

- Functions As A Maintained Or Non-Maintained Luminaire
- 20mm Cable Entries
- Loop In Loop Out Push Terminals For Easy Wiring
- Down Arrow Included. Different Exit Sign Plates Available\* - Left/Right: AEMBLADE/L/R, Up: AEMBLADE/UP
- >3 Hours Of Continuous Light In Emergency Mode
- Wall & Ceiling Mounting Kits Available\* - Recess: AEMBLADE/RKIT, Suspension: AEMBLADE/SKIT, Wall: AEMBLADE/WKIT
- Supplied With Down Legend

Scan For Instructions

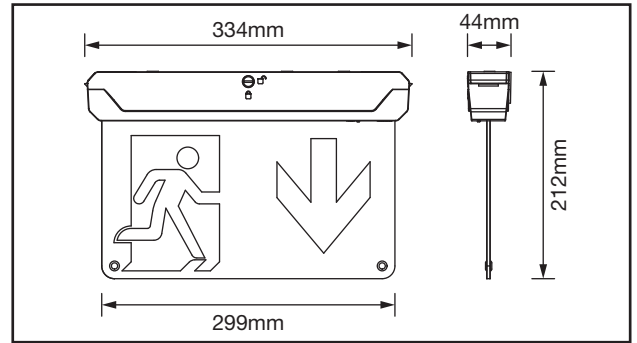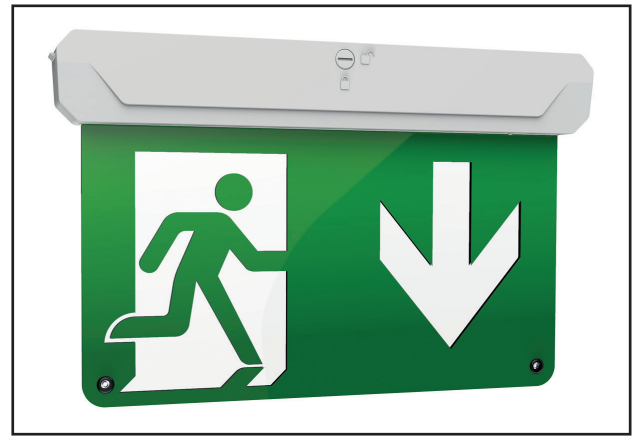

### TECHNICAL SPECIFICATIONS

Code	AEMBLADE/M
Luminous Flux (LM)	≤36lm
Useful Luminous Flux (LM)	≤36lm
Emergency Luminous Flux (LM)	≤25lm
CCT (Kelvin)	6500K
Beam Angle (°)	260°
SDCM	<6
CRI	>80
Peak Intensity (cd)	24cd
Operating Voltage (V)	220-240V AC
Emergency Output Power (W)	0.8W
Operating Power (W)	2.7W
Operating Current (A Max)	0.027A
Power Factor (Pf)	>0.3
Class	II
Body Material	Polycarbonate
Frame Colour	RAL9003
Switching Cycles	30,000
Ingress Protection	IP20
Ambient Operating Temperature (°C)	0°C ~ +50°C
Input Frequency (Hz)	50/60Hz
Guarantee	5 Years
Lifetime (L70 B50)	50,000 Hrs
Charge Time	24 Hrs
Battery Type	LiFePO4
Battery Voltage	3.2V DC
Battery Current	1100mAh
Battery Wattage Hours	3.52Wh
Emergency Duration	3 Hrs


### ACCESSORIES\*




**Left/Right Arrow Legend**  
AEMBLADE/L/R




**Up Arrow Legend**  
AEMBLADE/UP



**Recess Mount**  
AEMBLADE/RKIT



**Suspension Mount**  
AEMBLADE/SKIT



**Wall Mount**  
AEMBLADE/WKIT



\*Sold Separately