

### Firestay 5/7W LED CCT Dimmable Wattage Switchable Downlight with Tool Free Termination

**Part Code: 10510v2**

Our flagship downlight has received a major facelift. The Firestay CCT now includes a 4-way colour switch and 2-way wattage switch as standard. With an upgraded 10-year warranty, the new Firestay CCT is truly a fit and forget market leading downlight.

- Firestay Certification: 30, 60 and 90 minute solid joist ceilings, 30 minute I-Joist & Metal Web ceiling systems
- Suitable for Zone 1 applications
- Front CCT/Wattage Switch
- Mains Dimmable as standard
- Compatible with most branded Trailing Edge Dimmers, including the BELL Smart Universal LED Trailing/Leading Edge Dimmer Module Code: 10803



**Changeable**  
Bezels



**Colour  
Temperature**  
Options



**IP65**  
Rating



**Wattage**  
Switchable

# FirestayLED

CCT 3 way selectable colour switch



**Product Category** Fittings / Downlights

**Application** LED Downlights

**Product Warranty** 10 Years

**EAN** 5013588900018

**Commodity Code** 9405423990


**Country of Origin** CN

### Technical Specification

Wattage (W)	5/7
Volts (V)	220/240
Colour Temperature (K)	2700/3000/4000/6000
Lumen Output (lm)	5W = 684 (2700K) / 712 (3000K) / 793 (4000K) / 746 (6000K) - 7W = 1048 (2700K) / 1115 (3000K) / 1010 (4000K) / 970 (6000K)
Lumens per Watt (lm/W)	137-159
Candelas	550-720
CRI (ra)	85
Frequency (Hz)	50/60
Life Hours	70000
Switching Cycles	100000
IK Rating	IK07
IP Rating	IP65

### Packaging Information

Minimum Order Quantity	1
Height (mm)	45
Diameter (mm)	82
Cut Out (mm)	68
Individual Product Weight (kg)	0.215
Single Box Weight (kg)	0.3
Single Box Height (mm)	100
Single Box Width (mm)	88
Single Box Depth (mm)	85
Single Box Volume	0.00075
Inner Box Qty	10
Inner Box Barcode	10510V2000010
Inner Box Weight (kg)	3.18
Inner Box Height (mm)	455
Inner Box Width (mm)	210
Inner Box Depth (mm)	95
Inner Box Volume	0.00908
Outer Box Qty	20
Outer Box Barcode	10510V2000020
Outer Box Weight (kg)	6.42
Outer Box Height (mm)	465
Outer Box Width (mm)	220
Outer Box Depth (mm)	205
Outer Box Volume	0.02097
Plastic Packaging Weight (kg)	0.035
UNSPSC Code	39111515

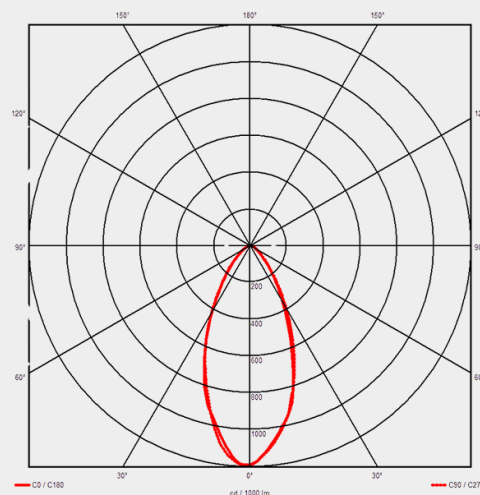



Additional Information	
Beam Angle	60°
Standard Deviation Colour Matching	<3-step MacAdam Ellipse