

Firestay 5/7W LED CCT Dimmable Wattage Switchable Downlight with Tool Free Termination

Part Code: 10510v2

Our flagship downlight has received a major facelift. The Firestay CCT now includes a 4-way colour switch and 2-way wattage switch as standard. With an upgraded 10-year warranty, the new Firestay CCT is truly a fit and forget market leading downlight.

- Firestay Certification: 30, 60 and 90 minute solid joist ceilings, 30 minute I-Joist & Metal Web ceiling systems
- Suitable for Zone 1 applications
- Front CCT/Wattage Switch
- Mains Dimmable as standard
- Compatible with most branded Trailing Edge Dimmers, including the BELL Smart Universal LED Trailing/Leading Edge Dimmer Module Code: 10803



Changeable
Bezels



**Colour
Temperature**
Options



IP65
Rating



Wattage
Switchable

FirestayLED

CCT 3 way selectable colour switch



Product Category Fittings / Downlights

Application LED Downlights

Product Warranty 10 Years

EAN 5013588900018

Commodity Code 9405423990


Country of Origin CN

Technical Specification

| | |
|------------------------|--|
| Wattage (W) | 5/7 |
| Volts (V) | 220/240 |
| Colour Temperature (K) | 2700/3000/4000/6000 |
| Lumen Output (lm) | 5W = 684 (2700K) / 712 (3000K) / 793 (4000K) / 746 (6000K) - 7W = 1048 (2700K) / 1115 (3000K) / 1010 (4000K) / 970 (6000K) |
| Lumens per Watt (lm/W) | 137-159 |
| Candelas | 550-720 |
| CRI (ra) | 85 |
| Frequency (Hz) | 50/60 |
| Life Hours | 70000 |
| Switching Cycles | 100000 |
| IK Rating | IK07 |
| IP Rating | IP65 |

Packaging Information

| | |
|--------------------------------|---------------|
| Minimum Order Quantity | 1 |
| Height (mm) | 45 |
| Diameter (mm) | 82 |
| Cut Out (mm) | 68 |
| Individual Product Weight (kg) | 0.215 |
| Single Box Weight (kg) | 0.3 |
| Single Box Height (mm) | 100 |
| Single Box Width (mm) | 88 |
| Single Box Depth (mm) | 85 |
| Single Box Volume | 0.00075 |
| Inner Box Qty | 10 |
| Inner Box Barcode | 10510V2000010 |
| Inner Box Weight (kg) | 3.18 |
| Inner Box Height (mm) | 455 |
| Inner Box Width (mm) | 210 |
| Inner Box Depth (mm) | 95 |
| Inner Box Volume | 0.00908 |
| Outer Box Qty | 20 |
| Outer Box Barcode | 10510V2000020 |
| Outer Box Weight (kg) | 6.42 |
| Outer Box Height (mm) | 465 |
| Outer Box Width (mm) | 220 |
| Outer Box Depth (mm) | 205 |
| Outer Box Volume | 0.02097 |
| Plastic Packaging Weight (kg) | 0.035 |
| UNSPSC Code | 39111515 |

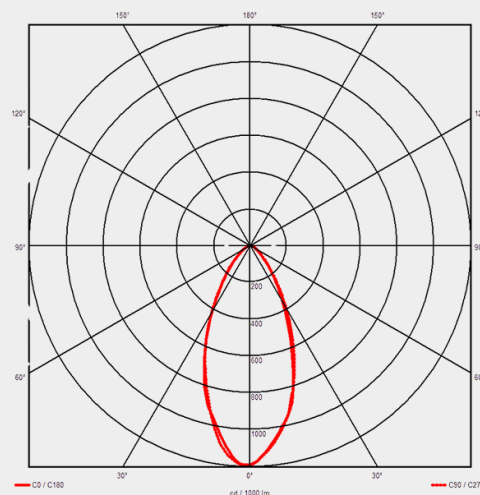



FirestayLED
CCT 3 way selectable colour switch

Additional Information

| | |
|------------|-----|
| Beam Angle | 60° |
|------------|-----|