



FXEXB EXIT BLADE



VARIANTS AVAILABLE: SELF-TEST / DALI-2


- Can be suspended, recessed, wall or ceiling mounted
- 8 year warranty including battery
- Blanking sheet including for single sided applications
- Remote control compatible
- Available in black
- Pre-commissioning feature via REM-E1



Part Number	Description	Viewing Distance	Output
FXEXBS-M-3	Exit Blade- Up - Self-test	30m	N/A
FXEXBS-M-3-D	Exit Blade- Down - Self-test	30m	N/A
FXEXBDL-M-3	Exit Blade- Up - DALI-2	30m	N/A

NOTE: Self-test luminaires are configured to manual test mode by default. If self-test mode is required, it should be activated via remote control. Available in black, add **-BLK** to the end of the product code to order. **Track mounted** option available on request.

DIMENSIONS

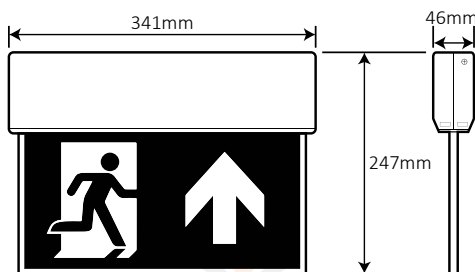

Technical Data	FXEXBS-M-3	FXEXBDL-M-3
Rated Supply Voltage	220-240V AC	220-240V AC
Mains Frequency	50 / 60 Hz	50 / 60 Hz
Max. Power Consumption	5W	5W
Standby Power	<0.5W	<0.5W
Emergency Output Power	1.5W	1.5W
Rated Emergency Duration	3 hrs*	> 3 hrs
Battery Charge Time	8 hrs (Initial up to 16 hrs)	20 hrs
Operational Temperature	0°C to 40°C	0°C to 40°C
Storage Temperature	0°C to 50°C	0°C to 50°C
Insulation Class	II	II
Ingress Protection	IP20	IP20
Impact Protection	IK06	IK06
Battery Type	1 x 18650 Li-ion 3.6V 2.5Ah	1 x 18650 Li-ion 3.6V 2.5Ah
Battery Code	FXC3.6-2500-A35	FXC3.6-2500-A35

*To optimise long-term battery performance, the luminaire will operate for 3 hours before automatically shutting down.

Logistics Information	FXEXBS-M-3	FXEXBDL-M-3
Product Dimensions	341 x 46 x 247mm	341 x 46 x 247mm
Net Weight	0.97kg	0.96kg
Box Dimensions	360 x 55 x 265mm	360 x 55 x 265mm
Gross Weight	1.01kg	1.13kg
Box Qty	10pcs	10pcs
Carton Dimensions	540 x 300 x 375mm	540 x 300 x 375mm
Carton Weight	11.55kg	11.75kg
Commodity Code	9405423100	9405423100

Materials	
Housing	Polycarbonate
Finish	Matt
Colour	White (black optional)
Screws	Nickel Steel

LED Light Source	
Type	2835
Colour Temp.	4000K
CRI	>80
LED Lifetime	50,000 hrs

SELF-TEST

Indicator LED Guide		
GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Charging
Fast Flash	Off	Function test or duration Test in progress
Off	On	Battery disconnected / Duration test failed
Slow Flash	Slow Flash	Battery temp. out of operational range
Off	Slow Flash	Light source fault

DALI-2

Indicator LED Guide		
GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Duration test in progress
Fast Flash	Off	Function test in progress
Off	On	Battery temp. out of operational range
Off	Slow Flash	Battery disconnected / Duration test failed
Off	Fast Flash	Battery low voltage.
Off	Off	Emergency function in operation
Alternating G > R > G...		DALI-2 identifying code

ACCESSORIES

REMOTE CONTROL



REM-E1	
Dimensions	117 x 38 x 13mm
Gross Weight	0.03kg
Commodity Code	85437003
<ul style="list-style-type: none"> Infrared remote control for all Fox Lux self-test luminaires, modules and remote packs. Batteries not included, requires 2 x AAA. <i>(NOT COMPATIBLE WITH DALI-2 PRODUCTS.)</i>	

EXIT BLADE SUSPENSION KIT



FXEXB-SK2	
Max. Suspension Length	2.0m
Gross Weight	0.08kg
Commodity Code	94059900
<ul style="list-style-type: none"> 2m suspension kit for Fox Lux Exit Blade. 	

EXIT BLADE RECESSING KIT



FXEXB-RK	
Dimensions	378 x 94 x 16mm
Cut Out	350 x 70mm
Gross Weight	0.12kg
Commodity Code	94059900
<ul style="list-style-type: none"> Semi recessed mounting kit for Fox Lux Exit Blade. 	

EXIT BLADE LEGENDS



FXEXB-D/LR/U	
Dimensions	318 x 167mm
Viewing Distance	30m
Gross Weight	0.04kg
Commodity Code	94059200
<ul style="list-style-type: none"> Interchangeable legends for Fox Lux Exit Blade. 	