


12W LED Dimming Power Supplies

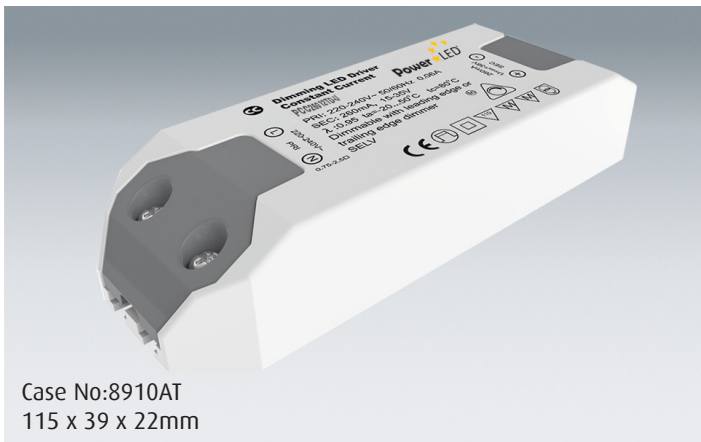

Case No:8910AT
115 x 39 x 22mm

Features

- Smooth Dimming
- Dimming Range 1 ~ 100%
- Dimmable with leading edge or trailing edge dimmer
- Constant current driver
- Independent compact design
- Screw lock cable strain relief for quick installation
- Short circuit, over load, over temperature protections
- Class II product
- SELV Equivalent



Specification

INPUT	Inrush	<12A
	Voltage	220V ~ 240VAC
	Frequency	50 ~ 60 Hz
	Power Factor	0.95
OUTPUT	MODEL No.	PCC26012TD-U
	Voltage	24-46V
	Current	260mA
	Power	12W
PROTECTION	Over Load	100~135% rated output power
	Over Temperature	Thermal shutdown
ENVIRONMENT	Ambient Temperature	Operating: -20 ~ +50℃
	Maximum Case Temperature	85℃
SAFETY	Safety Standard	Design refers to EN61347-1, EN61347-2-13
EMC	Emissions	Compliance to EN61000-3-2, EN61000-3-3, EN61547, EN55015

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.
3. Tolerance : includes set up tolerance, line regulation and load regulation.
4. Derating may be needed under low input voltage. Please check the static characteristics for more details.
5. The power supply is considered a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation.
6. Length of set up time is measured at first cold start. Turning the power supply ON/OFF may lead to increase of the set up time.
7. Suitable for indoor use only.

Dimensions

