

PCC4TD Series

4W Constant Current LED Driver



Key Features:


- Super Compact Design
- Primary and secondary sides come with leads
- Open Circuit, short circuit, over load and overheating protection
- Dimmable using leading or trailing edge dimmers
- Simple installation
- IP65

PCC4TD SPECIFICATION

Part Code	PCC2604TD	PCC3504TD	PCC5004TD	PCC7004TD
Input Voltage	220 ~ 240VAC	220 ~ 240VAC	220 ~ 240VAC	220 ~ 240VAC
Power Factor	0.9	0.9	0.9	0.9
Output Voltage	8 ~ 16V	6 ~ 12V	4 ~ 8V	3 ~ 6V
Input Current	260mA	350mA	500mA	700mA
Efficiency	72%	72%	70%	68%
Power	4W	4W	4W	4W
Ambient Temperature	-20 ~ +50°C			
Casing Temperature	80°C	80°C	80°C	80°C
Safety Standard	Design refers to EN61347-1, EN61347-2-13			
EMC	Compliance to EN55015, EN61000-3-2, EN61000-3-2, EN61000-3-3, EN61547			
Connections (input)	180mm 2C	180mm 2C	180mm 2C	180mm 2C
Connections (output)	180mm 2C	180mm 2C	180mm 2C	180mm 2C
Weight	40g	40g	40g	40g
Dimensions	53 x 27 x 21 mm	53 x 27 x 21 mm	53 x 27 x 21 mm	53 x 27 x 21 mm



Mechanical Diagrams

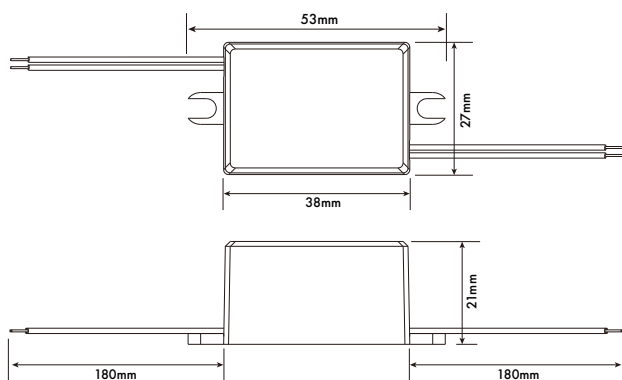

PowerLed (UK) Ltd
Orion House
Calleva Park
Aldermaston
Berkshire
RG7 8SN

Contact:
Tel: 0118 9703856
enquiries@powerled.uk.com
www.powerled.uk.com

