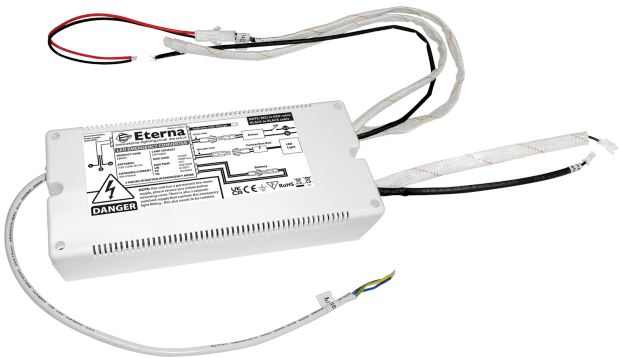


Emergency Battery Pack
3W remote standard emergency battery pack

- DESCRIPTION**
- Enables LED panel lights to be converted into emergency luminaires, rated at 10-60V 100W max
- FEATURES**
- Control gear can be removed from the housing: allows use in installations with smaller hole cut out
 - Push fit plug and socket: allows quick & easy installation. LED charge light
 - Ni-Cd 3.6V 4.5Ah battery 1 year warranty - Replacement battery code: EB5
 - 3 hours duration in emergency mode. Facility for non maintained mode and for remote switching
 - Enables LED luminaires to be converted to emergency, rated: 18-60Vdc maximum 150W load

GENERAL INFORMATION			
Light Source	LED	Colour / Finish	Grey
Application	Internal	Mounting Type	Recessed
Net Weight	0.92 kg		

TECHNICAL INFORMATION			
Nominal Voltage	240 V	Frequency	50Hz
Class Protection	1	Construction Materials Line 1	Polycarbonate
Dimensions - Height	55 mm	Dimensions - Width	110 mm
Dimensions - Depth	250 mm		

PRODUCT INFORMATION			
Wattage Combined	100W	Luminaire Lumens Combined	lm
lm/W Combined	0 lm/w	IP Rating	IP20





ACCESSORIES		
Product Code	Description	MOM / OPQ
EB5	Ni-Cd 3.6V 4.5Ah Stick Battery	1 / 1

PACKAGING	
Packaging Type	Plain Box
Individual unit gross weight	996 g
Pallet Layer Qty	100
Pallet Layers	4
Pallet Qty	400
MOM / OPQ	1 / 10

