



## ALTOS EMERGENCY HIGH BAY




VARIANTS AVAILABLE: SELF-TEST / DALI-2

- Highly efficient optical performance
- LiteIP compatible
- High output- typical mounting height 10m to 22m
- 8 year warranty including battery
- Remote control compatible
- Pre-commissioning feature via REM-E1



Part Number	Description	Output	Optic	Beam Angle
ALT-4380-WB-XS	Altos Emergency High Bay- Wide Beam- Self-test	670lm	Open area	128°
ALT-4380-RK-XS	Altos Emergency High Bay- Rack Lens- Self-test	700lm	Rack	106° x 80°
ALT-4380-CO-XS	Altos Emergency High Bay- Corridor Lens- Self-test	760lm	Corridor	150° x 88°
ALT-4380-WB-DL	Altos Emergency High Bay- Wide Beam- DALI-2	670lm	Open area	128°
ALT-4380-RK-DL	Altos Emergency High Bay- Rack Lens- DALI-2	700lm	Rack	106° x 80°
ALT-4380-CO-DL	Altos Emergency High Bay- Corridor Lens- DALI-2	760lm	Corridor	150° x 88°

### DIMENSIONS

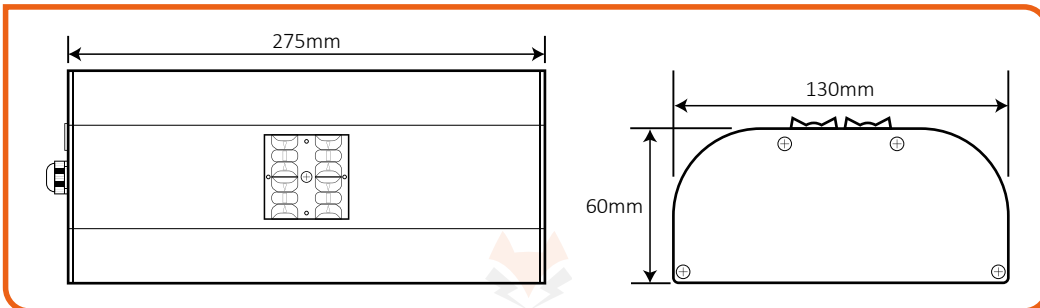

Technical Data	ALT-4380-*-XS	ALT-4380-*-DL
Rated Supply Voltage	220-240V AC	220-240V AC
Mains Frequency	50 / 60 Hz	50 / 60 Hz
Max. Power Consumption	5W	5W
Standby Power	<0.8W	<0.8W
Emergency Output Power	6W	6W
Rated Emergency Duration	3hrs**	> 3hrs
Battery Charge Time	8hrs (Initial up to 16hrs)	<40hrs
Operational Temperature	0°C to 40°C	0°C to 40°C
Storage Temperature	0°C to 50°C	0°C to 50°C
Insulation Class	I	I
Ingress Protection	IP44	IP44
Battery Type	4 x 18650 Li-ion 3.6V 10.0Ah	4 x 18650 Li-ion 3.6V 10.0Ah
Battery Code	FXC3.6-10000-D300	FXC3.6-10000-D300

\* Refers to lens type. Lens type does not affect the technical data.  
 \*\*To optimise long-term battery performance, the luminaire will operate for 3 hours before automatically shutting down.

Logistics Information	ALT-4380-*-XS
Product Dimensions	275 x 130 x 60mm
Net Weight	1.43kg
Box Dimensions	350 x 70 x 150mm
Gross Weight	1.55kg
Box Qty	4pcs
Carton Dimensions	350 x 160 x 300mm
Carton Weight	5.75kg
Commodity Code	905423100

Materials	
Housing	Aluminium / polycarbonate
Finish	Matt
Colour	Black
Screws	Nickel Steel

LED Light Source	
Type	3030
Colour Temp.	5700K
CRI	>70
LED Lifetime	50,000 hrs

### SELF-TEST

Indicator LED Status		
GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Charging
Fast Flash	Off	Function test or duration Test in progress
Off	On	Battery disconnected / Duration test failed
Slow Flash	Slow Flash	Battery temp. out of operational range
Off	Slow Flash	Light source fault

### DALI-2

Indicator LED Status		
GREEN LED	RED LED	STATUS
On	Off	Standby
Slow Flash	Off	Duration test in progress
Fast Flash	Off	Function test in progress
Off	On	Battery temp. out of operational range
Off	Slow Flash	Battery disconnected / Duration test failed
Off	Fast Flash	Battery low voltage.
Off	Off	Emergency function in operation
Alternating G > R > G...		DALI-2 identifying code

## ACCESSORIES

### REMOTE CONTROL



#### REM-E1

Dimensions	117 x 38 x 13mm
Gross Weight	0.03kg
Commodity Code	85437003

- Infrared remote control for all Fox Lux self-test luminaires, modules and remote packs.
- Batteries not included, requires 2 x AAA.  
*(NOT COMPATIBLE WITH DALI-2 PRODUCTS.)*

### ALTOS SUSPENSION KIT



#### ALT-SK2

Max. Suspension Length	2.0m
Gross Weight	0.08kg
Commodity Code	94059900

- 2m suspension kit for Fox Lux Altos.

