

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only



Kuna 2 in 1



08967 KUN0808/SST

Kuna Duo Emergency Bulkhead 8W Manual & Self-test 6500K

- Select manual or self-test mode via the internal dual-mode DIP switch
- Automatic self-test conforming to BS-EN-62034
- To adjust green LED indicator brightness, press and hold the test button for more than 2 seconds
- High emergency output of 1000lm
- Maintained and non-maintained option
- Trunking, surface and recessed mounting positions
- IP65 and IK10 (vandal resistant) for external uses
- BESA box fitting points

Overview

The Kuna is our high output emergency bulkhead that can be installed three different ways: trunking, surface and recessed. It is also both IP65 and IK10 rated for both internal and external uses and you are able to choose the emergency option you need via an internal switch - making it a very versatile option for any lighting



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II
L80B10 Lifetime (h) @Ta 25 °C	107,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022
EMC	EN 55015:2019+A11:2020, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary

Product Code	KUN0808/SST
Lumens Output Maximum	1,000 lm
Emergency Luminous Flux	1,000 lm
Maintained Luminous Flux	500 lm
L80B10 Lifetime (h) @Ta 25 °C	107,000 h
Cut-Out (mm)	105x305
BESA Entry	True
UEM/EME Battery Life	5 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME Power Factor	0.7
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	8 W
UEM/EME Protection	Class II
UEM/EME Weight	0.67 kg
UEM/EME Dimensions (L x W x D) (mm)	280x70x62
UEM/EME Emergency Operation Test	Automatic test/ Manual test
Beam Angle - Lumi (°)	90

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK

KosnicLightingUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only



Kuna 2 in 1

08967 KUN0808/SST

Accessories

Product Code	Description	Type
KUN-REC	Kuna Recessed installation kit	Installation kit
BATS20LFP6	Battery LiFePO4, 6000mAh capacity, 6.4V Voltage	Battery


Overview

The Kuna is our high output emergency bulkhead that can be installed three different ways: trunking, surface and recessed. It is also both IP65 and IK10 rated for both internal and external uses and you are able to choose the emergency option you need via an internal switch - making it a very versatile option for any lighting



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II

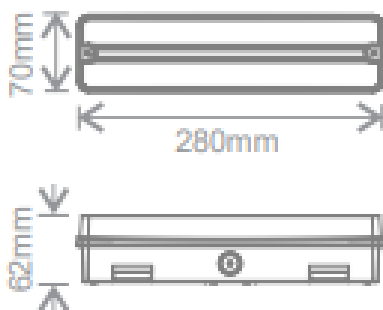

Healthy Statuses:

●	System Healthy
* — 1/2 s —	Duration Test Pending
* — 1/4 s —	Duration Test Running
* — 1/8 s —	Functional Test Running

Symbols explained:



Continuous On

Flash

On

Off

Faults & Warning:

●	Battery Charging Fault / Not Connected
* — 1/4 s —	Battery Duration Fault
* — 1/8 s —	Lamp or Luminaire Fault
* — 5 s — 1 s —	Installation Fault Warning

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK

7 **7 Years**
Product Warranty
UK Only

2 **2 Years**
On-Site Warranty
Main-land UK Only

Kuna 2 in 1



08967 KUN0808/SST

Push switch

 x1	FUNCTIONAL TEST
 x3	DURATION TEST
 HOLD	INDICATOR DIMMING

Overview

The Kuna is our high output emergency bulkhead that can be installed three different ways: trunking, surface and recessed. It is also both IP65 and IK10 rated for both internal and external uses and you are able to choose the emergency option you need via an internal switch - making it a very versatile option for any lighting



General Information

IK Rating	IK10
IP Rating	IP65
Materials	Housing: Polycarbonate
Installation Area	Internal and External
UEM/EME Protection	Class II

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK